


www.zaidimuaiksteles-bonita.lt

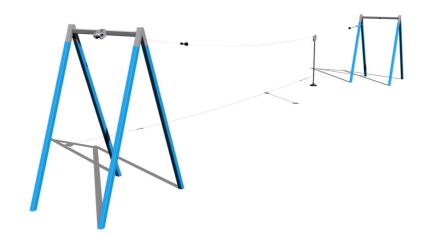

Twin post cableway LD020KB - Blue

LD-020KB20-10 Product type

| | | | | - | | | |
|---|----|----|---|----|----|------|----|
| н | 36 | | m | tn | rm | F1 1 | on |
| | | ю. | | ıv | | | |

Age category 3 - 15 years 24,8 m x 4 m Minimum area


Equipment measurements 22,68 m x 2 m x 3,86 m

1 m Free fall height: 130 kg Load capacity: Max. number of users: 2 Fall zone: EN 1177 null Designation: exterior Availability of spare parts:

supplied by the Certificate of Compliance: ČSN EN 1176 - 1

Material

Metal units - structural steel

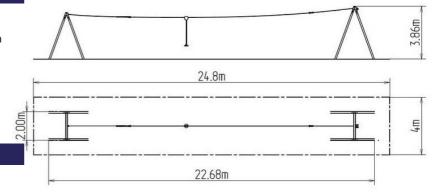

Finish

Duplex powder coated with coat curing Hot-dip galvanizing

Description

The support structures of the cableways are made from structural steel which is protected against corrosion by zinc coating, resulting in a very prolonged service life or duplex powder coated with coat curing according to RAL to prevent corrosion The structure is fixed in a concrete bed. All fastening material is galvanized or stainless steel.