

Twin post cableway LD030K - galvanized


Product type LD-030K20-10

Basic information

| | |
|------------------------------|--------------------------|
| Age category | 3 - 15 years |
| Minimum area | 24,8 m x 5,9 m |
| Equipment measurements | 22,68 m x 3,9 m x 3,86 m |
| Free fall height: | 1 m |
| Load capacity: | 130 kg |
| Max. number of users: | 4 |
| Fall zone: EN 1177 | null |
| Designation: | exterior |
| Availability of spare parts: | supplied by the |
| Certificate of Compliance: | ČSN EN 1176 - 1 |

Material

Metal units - structural steel

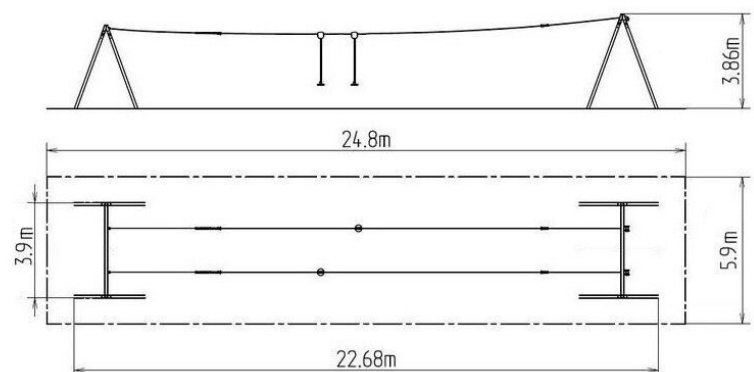

Finish

Hot-dip galvanizing

Description

The support structures of the cableways are made from structural steel which is protected against corrosion by zinc coating, resulting in a very prolonged service life or duplex powder coated with coat curing according to RAL to prevent corrosion. The structure is fixed in a concrete bed. All fastening material is galvanized or stainless steel.