

## Crawl tunnel AG-208K - metal


Product type AG-208K

### Basic information

Age category	Not specified
Minimum area	m x m
Equipment measurements	1,81 m x 0,73 m x 0,73 m
Free fall height:	m
Load capacity:	Not specified
Max. number of users:	Not specified
Fall zone: EN 1177	null
Designation:	exterior
Availability of spare parts:	supplied by the
Certificate of Compliance:	

### Material

Metal units - structural steel  
Tunnel - fibreglass

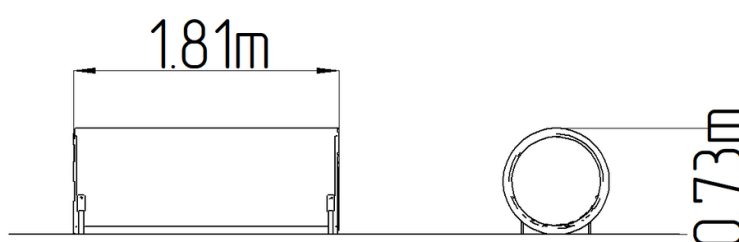

### Finish

Duplex powder coated with coat curing  
Hot-dip galvanizing

### Description

The support structure of the tunnel is made of structural steel which is protected against corrosion by zinc coating, resulting in a very prolonged service life of the workout elements or duplex powder coated with coat curing according to RAL to prevent corrosion. These structures are anchored to concrete footings. All other metallic elements are also zinc coated or duplex powder coated with coat curing according to RAL to prevent corrosion. Crawl tunnel is made from fibreglass which is UV stable and it is characterised by high colour stability. All fastening material is galvanized or stainless steel.