


Crawl tunnel AG-308K - metal

Product type AG-308K

Basic information

| | |
|------------------------------|--------------------------|
| Age category | Not specified |
| Minimum area | m x m |
| Equipment measurements | 2,74 m x 0,73 m x 0,73 m |
| Free fall height: | m |
| Load capacity: | Not specified |
| Max. number of users: | Not specified |
| Fall zone: EN 1177 | null |
| Designation: | exterior |
| Availability of spare parts: | supplied by the |
| Certificate of Compliance: | |

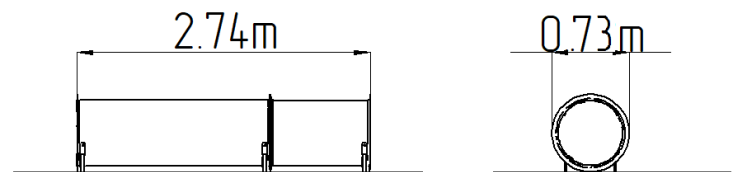

Material

Metal units - structural steel
 Tunnel - fibreglass

Finish

null
 null

Description

The support structure of the tunnel is made of structural steel which is protected against corrosion by zinc coating, resulting in a very prolonged service life of the workout elements, and coating with baked paint KOMAXIT according to the RAL colour system. These structures are anchored to concrete footings. All other metallic elements are also zinc coated and treated with baked paint KOMAXIT according to the RAL colour system.

Crawl tunnel is made from fibreglass which is UV stable and it is characterised by high colour stability. All fastening material is galvanized or stainless steel.