

Single post cableway LD010KR - Red


Product type LD-010KR20-10

Basic information

Age category	3 - 15 years
Minimum area	26,3 m x 4 m
Equipment measurements	24,04 m x 0,15 m x 3,78 m
Free fall height:	1 m
Load capacity:	130 kg
Max. number of users:	2
Fall zone: EN 1177	null
Designation:	exterior
Availability of spare parts:	supplied by the
Certificate of Compliance:	ČSN EN 1176 - 1

Material

Metal units - structural steel

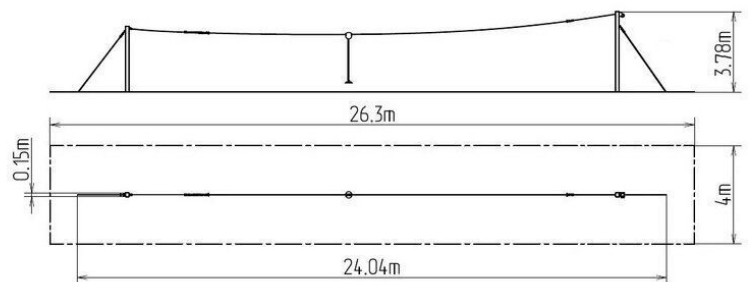

Finish

Duplex powder coated with coat curing
Hot-dip galvanizing

Description

The support structure are made from structural steel which is protected against corrosion by zinc coating, resulting in a very prolonged service life or duplex powder coated with coat curing according to RAL to prevent corrosion. The structure is fixed in a concrete bed. All other metal units are zinc coated or duplex powder coated with coat curing according to RAL to prevent corrosion. All fastening material is galvanized or stainless steel.