

Twin post cableway LD021K - galvanized


Product type LD-021K20-10

Basic information

| | |
|------------------------------|------------------------|
| Age category | 3 - 15 years |
| Minimum area | 24,8 m x 4 m |
| Equipment measurements | 22,68 m x 2 m x 3,86 m |
| Free fall height: | 1 m |
| Load capacity: | 130 kg |
| Max. number of users: | 2 |
| Fall zone: EN 1177 | null |
| Designation: | exterior |
| Availability of spare parts: | supplied by the |
| Certificate of Compliance: | ČSN EN 1176 - 1 |

Material

Metal units - structural steel
Platforms - HPL
Plastic units - HDPE

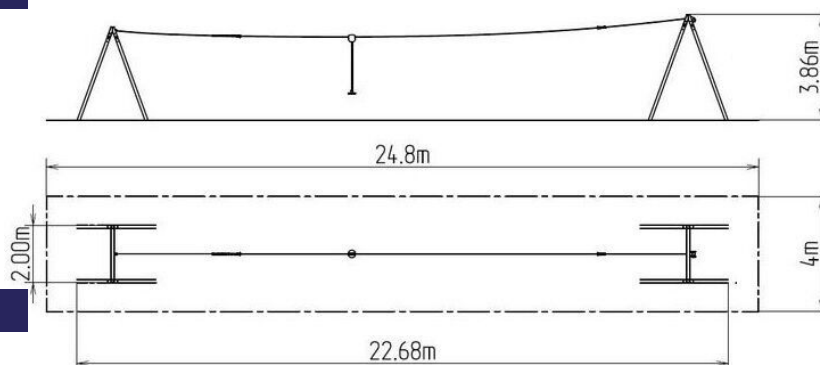

Finish

Hot-dip galvanizing

Description

The support structure are made from structural steel and is protected from corrosion by hot-dip galvanizing, which significantly prolongs the life of the play unit. The structure is fixed in a concrete bed. All other metal units are zinc coated or duplex powder coated with coat curing according to RAL to prevent corrosion. The platform and the ramp are made from HPL (High-pressure laminate, which is characterised by high colour stability and water resistance). Steps are made from high quality HDPE plastic (high density coloured polyethylene, which is characterised by high colour stability, UV resistance but mainly safety as it doesn't break and therefore there is no danger of injury to children by sharp fragments). All fastening material is galvanized or stainless steel.