

Twin post cableway with a ramps LD031KB - Blue


Product type LD-031KB20-10

Basic information

Age category	3 - 15 years
Minimum area	24,8 m x 5,9 m
Equipment measurements	22,68 m x 3,9 m x 3,86 m
Free fall height:	1 m
Load capacity:	130 kg
Max. number of users:	4
Fall zone: EN 1177	null
Designation:	exterior
Availability of spare parts:	supplied by the
Certificate of Compliance:	ČSN EN 1176 - 1

Material

Metal units - structural steel
Platforms - HPL
Plastic units - HDPE

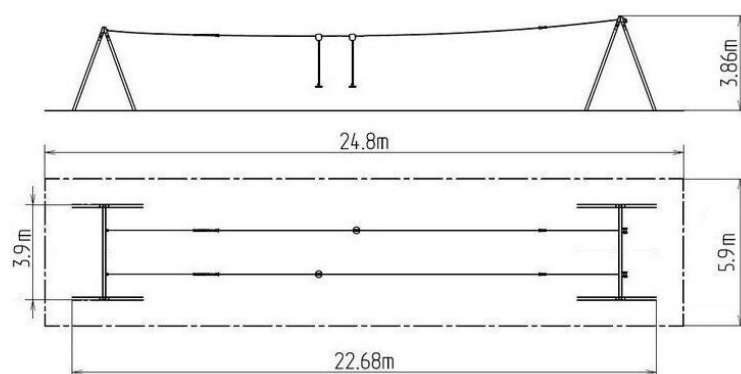

Finish

Duplex powder coated with coat curing
Hot-dip galvanizing

Description

The support structure are made from structural steel which is protected against corrosion by zinc coating, resulting in a very prolonged service life or duplex powder coated with coat curing according to RAL to prevent corrosion. The structure is fixed in a concrete bed. All other metal units are zinc coated or duplex powder coated with coat curing according to RAL to prevent corrosion. The platform and the ramp are made from HPL (High-pressure laminate, which is characterised by high colour stability and water resistance). Steps are made from high quality HDPE plastic (high density coloured polyethylene, which is characterised by high colour stability, UV resistance but mainly safety as it doesn't break and therefore there is no danger of injury to children by sharp fragments). All fastening material is galvanized or stainless steel.